

UK Patent Application (19) GB (11) 2 378 125 (13) A

(43) Date of A Publication 05.02.2003

(21) Application No 0127885.2

(22) Date of Filing 21.11.2001

(30) Priority Data

(31) 01045773

(32) 28.07.2001

(33) KR

(51) INT CL⁷
A47L 9/16

(52) UK CL (Edition V)
A4F FFD

(56) Documents Cited

EP 0489468 A

WO 1997/012660 A

US 4581050 A

PAJ abstract of JP040156810 (MATSUSHITA)

(58) Field of Search

UK CL (Edition T) A4F FFD

INT CL⁷ A47L 9/16

Other: Online: WPI EPDOC JAPIO

(71) Applicant(s)

Samsung Kwangju Electronics Co., Ltd.
(Incorporated in the Republic of Korea)
271 Oseon-dong, Kwangsan-gu,
Kwangju-city, Republic of Korea

(72) Inventor(s)

Jang-keun Oh

(74) Agent and/or Address for Service

Barker Brettell


138 Hagley Road, Edgbaston,
BIRMINGHAM, B16 9PW, United Kingdom

(54) Abstract Title

Vacuum cleaner

(57) A vacuum cleaner comprises a suction brush (20) movably disposed at a lower portion of a cleaner body (10), a by-pass motor (30) disposed in the cleaner body and generating a suction force at the suction brush (20), a cyclone dust-collecting apparatus (40) disposed in the cleaner body (10) and having an inflow passage (42a), into which air passing by the by-pass motor (30) flows, and an outflow passage (42b) through which the air cleaned by a separation effect of centrifugal force is discharged, and a dust bag (50) disposed in the cleaner body (10) and connected to the outflow passage (42b) for filtering minute dust entrained in the once cleaned air which is discharged from the cyclone dust-collecting apparatus (40).

FIG.3

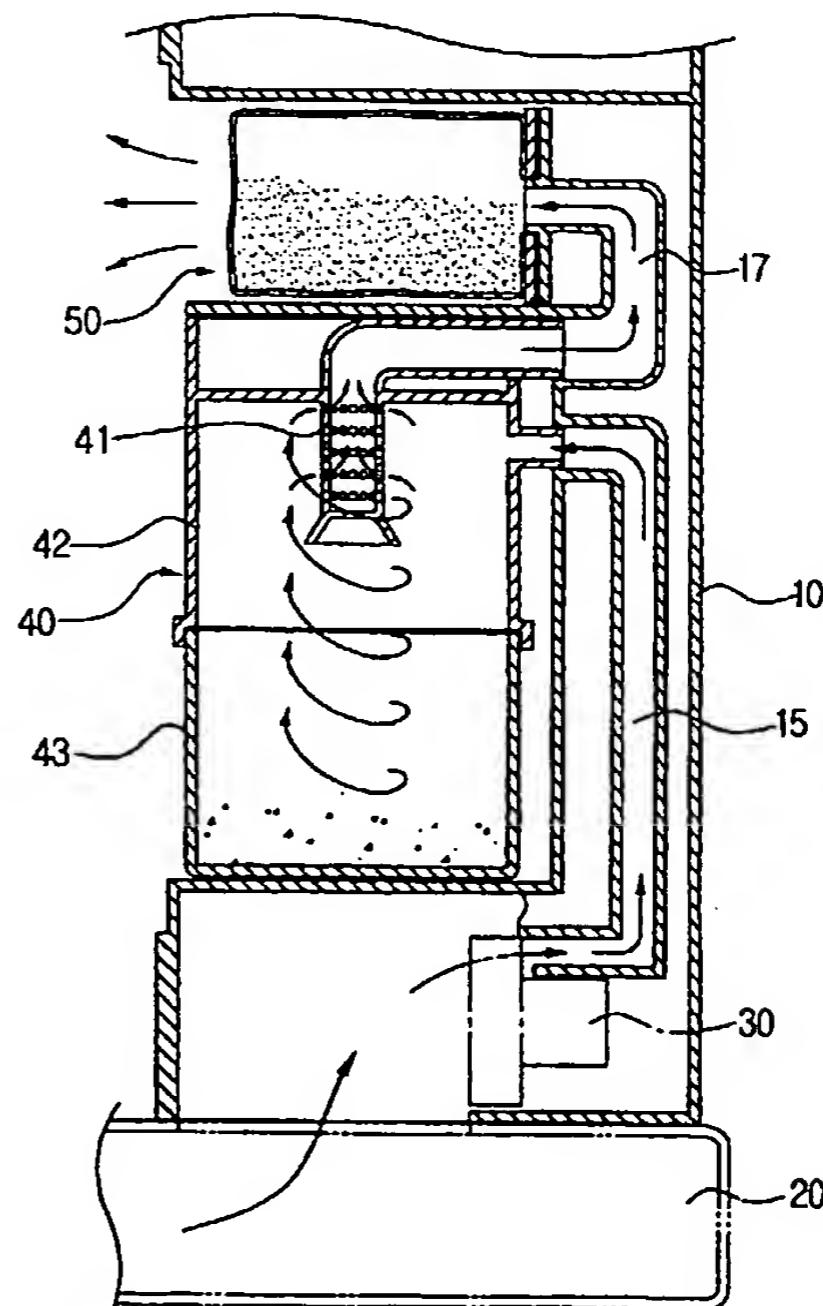

GB 2 378 125 A

Vacuum cleaner

Patent number: GB2378125
Publication date: 2003-02-05
Inventor: OH JANG-KEUN (KR)
Applicant: SAMSUNG KWANGJU ELECTRONICS CO (KR)
Classification:
- **international:** A47L9/16
- **european:** A47L9/14, A47L9/16
Application number: GB20010027885 20011121
Priority number(s): KR20010045773 20010728

Also published as:

 US6732405 (B2)
 US2003019073 (A1)
 CA2387553 (A1)
 AU763287 (B2)

Abstract of GB2378125

A vacuum cleaner comprises a suction brush (20) movably disposed at a lower portion of a cleaner body (10), a by-pass motor (30) disposed in the cleaner body and generating a suction force at the suction brush (20), a cyclone dust-collecting apparatus (40) disposed in the cleaner body (10) and having an inflow passage (42a), into which air passing by the by-pass motor (30) flows, and an outflow passage (42b) through which the air cleaned by a separation effect of centrifugal force is discharged, and a dust bag (50) disposed in the cleaner body (10) and connected to the outflow passage (42b) for filtering minute dust entrained in the once cleaned air which is discharged from the cyclone dust-collecting apparatus (40).

Data supplied from the **esp@cenet** database - Worldwide